



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

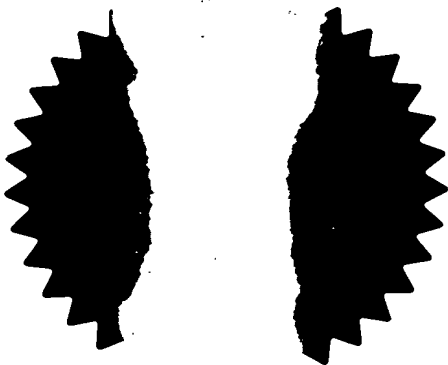

Signed 

Dated 10 July 2003





1/77
02AUG02 E737994-6 D10121
P01/7700 0.00-0217917.4

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

01 AUG 2002

1. Your reference

P16289

2. Patent application number

(The Patent Office will fill in this part)

0217917.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

1) VARINTELLIGENT (BVI) LIMITED
CRAIGMUIR CHAMBERS

P.O. BOX NO. 71, ROAD TOWN, TORTOLA
BRITISH VIRGIN ISLANDS

2) TERENCE LESLIE JOHNSON

C/O EDWARD EVANS BARKER

CLIFFORD'S INN, FETTER LANE

LONDON EC4A 1BZ

1) BRITISH VIRGIN ISLANDS 2) UNITED KINGDOM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

HIGH CONTRAST BLACK-AND-WHITE CHIRAL NEMATIC DISPLAYS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Edward Evans Barker
Clifford's Inn
Fetter Lane
London EC4A 1BZ

Patents ADP number (if you know it)

8199895001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s) 6

Abstract

Drawing(s)

2 + *LFK*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Terry L. Johnson

Date

01.08.2002

12. Name and daytime telephone number of person to contact in the United Kingdom

TERRY L. JOHNSON - 0207 405 4916

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

HIGH CONTRAST BLACK-AND-WHITE CHIRAL NEMATIC DISPLAYS

This invention describes a new chiral nematic display configuration to achieve high contrast black-and-white display.

Classical liquid crystal displays have been widely used in various applications. Severe viewing angle dependence and high power consumption in backlight are major drawbacks for some applications. There has accordingly been active research in chiral nematic liquid crystals in the last few decades. One of the main features in chiral nematic displays is that the bright state and the dark state are bistable, i.e. stable even when the voltage is not connected. This bistability nature results in image retention and flicker-free viewing. Moreover, driving methods and electro-optic response of chiral nematic displays are different from classical liquid crystal displays and result in no limitation on the maximum multiplexing of the display.

There are in such displays two stable states, namely a planar state and a focal conic state. In the planar state, liquid crystal molecules are aligned in a helix form where the axis of the helix is perpendicular to the display plane. Circular polarized light of wavelength matching the pitch and handedness of the helix is reflected by Bragg reflection. This pitch of the helix structure and hence peak reflection wavelength can be adjusted to a visible range or invisible range of the spectrum. The remaining spectrum passes through the chiral nematic and is unaffected. Moreover, for opposite circular polarization, the entire spectrum passes through the chiral nematic and is not affected. On the other hand, in the focal conic state, the liquid crystals form micro-domains and each domain is a small helix structure and the helical axes are highly tilted from the display normal, more or less parallel to the plane of the display. Light is scattered (backwardly,

sidely and mainly forwardly) at the domain boundaries where there is an abrupt change in the optical refractive index. The focal conic state is transparent with haze, and the polarization of transmitted light is destroyed.

In many applications, very high information content displays with good contrast and low power consumption are required. Chiral nematic displays have particular advantages of availability in very high resolution, image retention and very low power consumption, high contrast and very wide viewing angles.

According to the invention there is provided a full spectrum black-and-white reflective chiral nematic display comprising:-

a chiral nematic display of controllable planar structure and focal conic structure with chiral nematic liquid crystal material being between two transparent substrates having conductive electrodes, the material being between two elliptical polarizers, and there being an optical reflector.

Thus using the invention, two bistable chiral nematic display configurations can be utilized. Each display has a full spectrum white with high contrast. They have very low power consumption and any driving schemes suitable for driving chiral nematic displays to planar and focal conic states can be applied to the display.

Chiral nematic displays embodying the invention are hereinafter described, by way of example, with reference to the accompanying drawings.

Figure 1 depicts the first optical configuration of the black-and-white chiral nematic display in this invention;

Figure 2 depicts the second optical configuration of the black-and-white chiral nematic display in this invention;

Figure 3 shows the reflection and transmission properties at the planar state where the incoming light is of the same elliptical polarization as the chiral nematic material;

Figure 4 shows the reflection and transmission properties at the planar state where the incoming light is of opposite elliptical polarization as the chiral nematic material;

Figure 5 shows the reflection and transmission properties of the chiral nematic material at the focal conic state.

Referring to the drawings, in which like parts are indicated by like numbers. In general, chiral nematic displays 1 are disclosed comprising essentially laminates of, as viewed from in front or the top in the drawings, a linear polarizer 2, a quarter wave retardation film 3, front and rear transparent substrates 4, 5 with conductive electrodes and a chiral nematic liquid crystal 6 sandwiched therebetween, a quarter wave retardation film 7, a linear polarizer 8 and a reflector 9.

The linear polarizer 2 and quarter wave retardation film 3 form an opposite circular polarization to the chiral nematic display.

Referring now to a first optical mode configuration as illustrated in Figure 1, the structures of the first black-and-white chiral nematic display is by adding two elliptical polarizers 2, 3 and 7, 8 of opposite senses (left hand as well as right hand) of handedness and a reflector to the chiral nematic display 6. The elliptical (in particular, circular) polarizers are selected so as to match the polarization type (i.e. circular) of the chiral nematic reflection and transmission. A simple way of making a circular polarizer is to laminate a linear polarizer 2, 8 with a quarter wave retardation film 3, 7 at 45° . The quarter wave retardation film is preferably of wideband. The angle between the linear polarizer and the quarter wave retardation film is adjusted appropriately to give either a left hand circular polarizer or a right hand circular polarizer. The chiral nematic display 6

consists of a chiral nematic liquid crystal material layer of any reflection spectrum and any sense (hand) of circular polarization, sandwiched between the two transparent substrates 4, 5 each with transparent conductive electrodes. The transparent substrates 4, 5 can be of any transparent material not altering the polarization when light is passing through. Examples of such transparent substrates are glass or plastic. The transparent conductive electrodes can be indium tin oxide or tin oxide, for example. The chiral nematic liquid crystal 6 material possesses stable planar state and focal conic state. The chiral nematic display is then sandwiched between the opposite hand elliptical polarizers 2, 3 and 7, 8 where the front elliptical polarizer is of opposite sense to the chiral nematic liquid crystal material and the rear elliptical polarizer is of the same sense as the chiral nematic liquid crystal material. Moreover, the front and rear quarter wave retardation films 3, 7 are facing the respective transparent substrates 4, 5 of the chiral nematic display 6 so that the light entering into the intermediate chiral nematic material from above or below in the entire optical path is elliptically polarized. Below the linear polarizer of the rear elliptical polarizer, a reflector is placed. This is the first structural configuration of the black-and-white chiral nematic display embodying the invention.

In the white "ON" state, the chiral nematic liquid crystal 6 materials are in a focal conic state. When unpolarized light passes through the front elliptical polarizer 2, 3, half of the light intensity is absorbed and the remaining carries on into the chiral nematic materials. This light is depolarised by the focal conic structure and becomes linearly polarized with another loss in 50% intensity after passing the rear elliptical polarizer 7, 8. This linear polarized light is reflected by the reflector 9 and goes through the rear elliptical polarizer 7, 8 again. After passing through the chiral nematic material 6 again, the light becomes unpolarized. This unpolarized light becomes polarized again after passing

through the front elliptical polarizer 2, 3 and the intensity is further reduced by half. The optical path polarized/depolarised/polarized/reflected/depolarised/polarized is independent of wavelength and if the incoming light is white, the outgoing light to the viewer is also white. The intensity at the white "ON" state is 12.5% as the incoming light.

In the dark "OFF" state, the chiral nematic liquid crystal materials are in a planar state. Similar to the "ON" case, the light entering into the chiral nematic material 6 is circularly polarized (opposite sense as the chiral nematic material) with 50% reduction in intensity after passing through the front polarizer. As shown in Figure 4, this polarized light is unaltered and completely passes through the chiral nematic materials. Then it is totally absorbed by the rear elliptical polarizer (of opposite polarity as the front polarizer). There is no light entering to the mirror and a dark state results. Zero light intensity will be viewed by the viewer.

The second optical mode configuration is illustrated in Figure 2. The structure of the second black-and-white chiral nematic display embodying the invention is by adding two elliptical polarizers 2', 3' and 7', 8' of same sense of handedness and a reflector 9' to the chiral nematic display 4, 5, 6. The sense of the elliptical polarizers 2', 3' and 7', 8' is opposite to the chiral nematic material 6. The elliptical (to be more precise, circular) polarizers are selected so as to match the polarization type (i.e. circular) of the chiral nematic reflection and transmission. A way of making circular polarizer is to laminate a linear polarizer 2', 7' with a quarter wave retardation film 3', 8' at 45° . The quarter wave retardation film is preferably of wideband. The angle between the linear polarizer and the quarter wave retardation film is adjusted appropriately to give either a left hand circular polarizer or a right hand circular polarizer. The chiral nematic display 6 consists of a chiral nematic liquid crystal material layer, of any reflection spectrum and any

handedness, sandwiched between two transparent substrates with transparent conductive electrodes. The transparent substrates can be any transparent material not altering the polarization when light is passing through. Examples of such transparent materials can be glass or plastic. The transparent conductive electrodes can be indium tin oxide or tin oxide for example. The chiral nematic liquid crystal material possesses a stable planar state and a focal conic state. The chiral nematic display 6 is then sandwiched between the elliptical polarizers (of opposite sense as the chiral nematic material). Moreover, the front and rear quarter wave retardation films 3', 7' are facing the transparent substrate of the chiral nematic display so that any light entering into the intermediate chiral nematic material from above and below in the entire optical path is elliptically polarized. Below the linear polarizer of the rear elliptical polarizer, a reflector 9' is placed. This is the second structural configuration of the invented black-and-white chiral nematic display.

In the white "ON" state, the chiral nematic liquid crystal materials are in a planar state. When unpolarized light passes through the front polarizer, half of the intensity is absorbed and the remaining circular polarization goes into the chiral nematic materials. This light (of opposite sense as the chiral nematic material) passes through the chiral nematic material, the rear polarizer, is reflected by the reflector and re-enters the rear polarizer, the chiral nematic material and finally the front polarizer without any change in the polarization and intensity. This outgoing light is viewed by the viewer. The entire light path is independent of wavelength and the reflected light is white coloured with light intensity 50% of the original incoming light.

In the dark "OFF" state, the chiral nematic liquid crystal materials are in a focal conic state. Similar to the "ON" case, the light entering into the chiral nematic material is circularly polarized. This polarized light is depolarised by the focal conic chiral nematic

material. The depolarised light passes through the rear polarizer, becomes polarized and its intensity is halved. This polarized light is then reflected by the mirror 9' and re-enters the rear polarizer without any change of polarization and intensity. The light will pass through the focal conic chiral nematic material and is depolarised again. This depolarised light passes through the front polarizer again, becomes polarized and its intensity is halved. The outgoing (polarized) light, viewed by the viewer, is white coloured with intensity 12.5%.

It will be understood from the foregoing that in the embodiment of Figure 1, a first optical configuration embodying the invention is described. The black-and-white chiral nematic display configuration is made up by a chiral nematic display of any reflection spectrum and any elliptical polarization. The chiral nematic material selectively reflects and transmits light of certain elliptical (in particular, circular) polarizations. The angle between the front linear polarizer and the front quarter wave retardation film is optimised so that linear polarized light is converted into elliptically polarized light corresponding to that of the chiral nematic materials. The same is also achieved for the rear linear polarizer and the rear quarter wave retardation film. The front elliptically polarized light is adjusted to be of opposite polarity to that of the chiral nematic material. The angle between the rear linear polarizer and rear quarter wave retardation film is selected so that it is of the same polarity as the chiral nematic material.

The optical bright "ON" state of the configuration given by Figure 1 is when the chiral nematic material is in the focal conic state and the optical dark "OFF" state is when the chiral nematic material is in the planar state.

The optical path description of the first optical configuration in the case of bright "ON" state is now described. When incoming unpolarized light hits the front linear

polarizer 2, 3, the light is linearly polarized and then enters to the quarter wave retardation film. The quarter wave retardation film converts the linear polarized light into elliptically polarized light having opposite polarity to the chiral nematic material. Half of the light is absorbed by the linear polarizer. After the front quarter wave retardation film, elliptically polarized light enters to the focal conic chiral nematic and is depolarised. This depolarised light passes through the rear quarter wave retardation film and the rear linear polarizer. After the rear linear polarizer, half of the light is blocked and the remaining polarization half becomes linear polarized. It is then reflected by the mirror 9 and re-enters the rear linear polarizer 7, 8 and the rear quarter wave retardation film without any intensity attenuation. Then it becomes elliptically polarized after the rear quarter wave retardation film and re-enters to the focal conic chiral nematic. The elliptically polarized light is then depolarised. This depolarised light will be polarized after passing through the front polarizer and the intensity is halved again. This polarized/depolarised/polarized/reflected/depolarised/polarized optical path is independent of the wavelength and the reflected light at the viewer consist of full spectrum white and the intensity is 12.5% of the original incoming light.

In the case of dark "OFF" state, the mechanism of the light through the front elliptical polarizer is the same as in the "ON" state. Elliptically polarized light of opposite polarity to the chiral nematic material enters into the intermediate chiral nematic material. In the planar state, this elliptically polarized light will transmit through the chiral nematic material without any change in polarization and intensity. This polarized light will enter to the rear elliptical polarizer (of opposite polarity) and is then completely absorbed. No light will enter to the reflector and therefore no light escapes to the viewer. This polarized/transmission/absorption optical path gives a dark state and zero reflectance to

the viewer. The contrast of black-and-white in this first invented optical configuration is very high, and theoretically infinite contrast ratio.

In Figure 2, the second optical configuration of the invention is described. The black-and-white chiral nematic display is made up by any chiral nematic display of any reflection spectrum and any elliptical polarization. Chiral nematic material selectively reflects and transmits light of certain elliptical (in particular, circular) polarizations. The angle between the front linear polarizer and the front quarter wave retardation film is optimised so that linear polarized light is converted into elliptically polarized light corresponding to that of the chiral nematic materials. The same is also achieved for the rear linear polarizer and the rear quarter wave retardation film. The front and rear elliptically polarized light are adjusted to be of opposite handedness as the chiral nematic material.

The optical bright "ON" state of the configuration given by Figure 2 is when the chiral nematic material is in the planar state and the optical dark "OFF" state is when the chiral nematic material is in the focal conic state.

The optical path description in the case of bright "ON" state is now described. When incoming unpolarized light hits the front linear polarizer 2, 3 the outgoing light is linearly polarized and then enters to the quarter wave retardation film 5.

It will be understood that the threshold voltage of the chiral nematic material can be lowered by a larger pitch chiral nematic material.

Moreover, the reflective mode configurations described herein consume very little power and no lighting is required. To generate full colour or area colour, a colour filter can be added to any locations of the structure. The reflector 9, 9' can be of any type, specular or diffusive. The planar states and focal conic states of the two optical mode configurations are stable even when the power is disconnected and the change of these two stable states can be achieved by any chiral nematic driving schemes. Different tones of grey scales can be achieved by controlling different proportions of planar structure and focal conic structure domains in a certain area. It is controlled by any chiral nematic grey scale driving schemes. Full colour or area colour chiral nematic displays can be achieved by adding a colour filter in any locations of the structure. These two invented optical mode configurations can be adopted in all chiral nematic display applications such as handheld devices, information boards and billboards. For example, in high information handheld, browsing and reading devices, black-and-white displays are desired to resemble the conventional black-and-white paper. Thus, the invention is related to the configuration of high contrast black-and-white chiral nematic displays. The mechanism of the black-and-white chiral nematic display configuration in this invention is making use of the properties of selective spectral reflection of elliptical polarization and transmission of the residual spectrum of the same elliptical polarization together with the whole spectrum of the opposite elliptical polarization in chiral nematic planar structure and the depolarisation of light in chiral nematic focal conic structure.

CLAIMS

1. A full spectrum black-and-white reflective chiral nematic display comprising:
a chiral nematic display of controllable planar structure and focal conic structure,
with the chiral nematic liquid crystal material being between two transparent substrates
having conductive electrodes, the material being between two elliptical polarizers, and
there being an optical reflector.
2. A display according to Claim 1, ~~one~~ elliptical polarizer being of opposite
polarity and the second elliptical polarizer being of the same polarity to the chiral nematic
liquid crystal material.
- ~~3. A display according to Claim 2, both elliptical polarizers being of opposite polarity
to the chiral nematic liquid crystal material.~~
- ~~3.4.~~ A device according to Claim 1 ~~any preceding claim~~, which has an optically "ON"
bright state when the chiral nematic materials are in the focal conic state.
- ~~4.5.~~ A device according to Claim ~~3~~4, having an optically "ON" bright state of full
spectrum white.
- ~~6.5.~~ A device according to any of Claims 1-~~23~~, which has an optically "OFF" dark state
when the chiral nematic material is in the planar state.
- ~~6.7.~~ A display according to any preceding claim, in which the chiral nematic material
has the reflection spectrum of a particular peak wavelength and elliptical polarization, and
transmission of the residual spectrum of this elliptical polarization and the whole spectrum
of opposite elliptical polarization.
- ~~8. A display according to any preceding claim, in which the two elliptical polarizers
are of opposite polarities.~~

~~7.9.~~ A display according to any preceding claim, in which the two elliptical polarizers are wideband or otherwise.

~~8.10.~~ A device according to any preceding claim, the chiral nematic display being sandwiched between two orthogonal elliptical polarizers and the reflector being laminated on the rear elliptical polarizer.

~~9.11.~~ A device according to any preceding claim, the arrangement of front and rear elliptical polarizers being such that the light entering into the chiral nematic material from above or below is elliptically polarized, and is achieved by the arrangement that the quarter wave retardation films of the front and rear elliptical polarizers are facing to the transparent substrate of the chiral nematic display.

~~10.12.~~ A device according to any of Claims 1-~~9.11~~, the arrangement of the rear elliptical polarizer being such that the light incident on the reflector is linearly polarized.

~~11.13.~~ A device according to Claim 1, wherein the light leaving the front elliptical polarizer entering the chiral nematic material is elliptically polarized with opposite polarity to that of the chiral nematic material, the front elliptical polarizer being of opposite polarity to the chiral nematic material.

~~12.14.~~ A display according to Claim 1, the rear elliptical polarizer being of the same polarity as the chiral nematic material.

~~13.15.~~ A device according to any preceding claim, the reflector being diffusive or otherwise.

~~14.16.~~ A device according to any preceding claim, wherein the "ON" state is caused by depolarisation of light when passing through the focal conic state chiral nematic material.

~~15.17.~~ A device according to any preceding claim, wherein in the "ON" state of the device the depolarisation is independent of wavelength.

~~16.18.~~ A device according to any preceding claim, wherein in the "OFF" state of the device the opposite polarity of elliptically polarized light enters into the planar state chiral nematic material and passes through without any polarization change.

~~17.19.~~ A device according to any of Claims 1-~~16~~7, wherein the "OFF" state of the device is caused by the absorption of light by a pair of orthogonal front and rear elliptical polarizers.

~~18.20.~~ A device according to any preceding claim, wherein in the "OFF" state of the device the absorption of light is independent of wavelength.

~~19.21.~~ A full spectrum black-and-white reflective chiral nematic display comprising:
a chiral nematic display of controllable planar structure and focal conic structure whereby the chiral nematic liquid crystal materials are sandwiched between two transparent substrates each coated with a transparent electrode, two elliptical polarizers, both being of opposite polarity to that of the chiral nematic liquid crystal, and an optical reflector.

~~20.22.~~ A device according to Claim ~~19~~21, in which an optically "ON" bright state is when the chiral nematic materials are in the planar state.

~~21.23.~~ A device according to Claim ~~19~~21 or ~~20~~22, the optically "ON" bright state being of full spectrum white.

~~22.24.~~ A device according to any of claims ~~19~~21-~~21~~23, which has an optically "OFF" dark state when the chiral nematic materials are in the focal conic state.

~~23.25.~~ A device according to any of Claims ~~19~~21-~~22~~24, in which the chiral nematic material has the reflection spectrum of a particular peak wavelength and elliptical polarization, and transmission of the residual spectrum of this elliptical polarization and the whole spectrum of opposite elliptical polarization.

- ~~24.26.~~ A device according to any of Claims ~~1921-2325~~, in which the two elliptical polarizers are of the same polarity and are both opposite to the polarity to the chiral nematic liquid crystal materials.
- ~~25.27.~~ A device according to any of Claims 19-~~2426~~, in which the chiral nematic display is sandwiched between the two elliptical polarizers and the reflector is laminated on the rear elliptical polarizer.
- ~~26.28.~~ A device according to Claim ~~2527~~, in which the two elliptical polarizers are wideband or otherwise.
- ~~27.29.~~ A device according to any of Claims ~~1921-2628~~, the arrangement of front and rear elliptical polarizers being such that the light entering into the chiral nematic material from above or below is elliptically polarized, and is achieved by the arrangement that the quarter wave retardation films of the front and rear elliptical polarizers are facing to the transparent substrate of the chiral nematic display.
- ~~28.30.~~ A device according to any of Claims 19-~~278~~, the arrangement of the rear elliptical polarizer being such that the light incident or reflector is linearly polarized.
- ~~29.31.~~ A device according to any of Claims ~~1921-2830~~, the reflector being diffusive or otherwise.
- ~~30.32.~~ A device according to any of Claims ~~1921-2931~~, the "ON" state being caused by maintaining the elliptical polarization of the light opposite to the chiral nematic material along the subsequent optical path after the first time passing through the front polarizer when the chiral nematic material is at a planar state.
- ~~31.33.~~ A device according to Claim ~~3032~~, wherein in the "ON" state the entire optical path is independent of wavelength.

~~32.34.~~ A device according to any of Claims ~~1921-3133~~, wherein the "OFF" state is as a result of the depolarisation of light at the focal conic chiral nematic materials.

~~33.35.~~ A device according to Claim ~~3234~~, wherein in the "OFF" state the depolarization of light is independent of wavelength.

~~34.36.~~ A device according to any preceding claim, the transparent substrate have properties such that the polarization of the light passing through it is not affected.

~~35.37.~~ A device according to Claim ~~3436~~, the substrate being glass or plastic.

~~36.38.~~ A device according to any preceding claim, in which the transparent electrodes are electrically conductive.

~~37.39.~~ A device according to Claim ~~3638~~, the electrodes being indium tin oxide or tin oxide.

~~38.40.~~ A device according to any preceding claim, made to full colour or area colour by adding a colour filter at any location in the structure.

~~39.41.~~ A device according to any preceding claim, which device has grey scale capability wherein the planar structure and the focal conic structure co-exist within the pixel area.

~~40.42.~~ A device according to Claim ~~3941~~, wherein different tones of grey scale within any pixel are caused by different ratios of planar structure and focal conic structure domains of the chiral nematic materials in a local area.

~~41.43.~~ A device according to any preceding claim, having static driving scheme(s).

~~42.44.~~ A device according to any of Claim 1-~~4042~~, having active matrix driving scheme(s).

~~43.45.~~ A device according to any of Claims 1 to ~~4042~~, having passive matrix driving scheme(s).

~~44.46.~~ A device according to any of Claims 1 -~~4042~~, having grey scale driving scheme(s)

~~45.47.~~ A device according to any of Claims 1-~~40~~42, having dynamic driving scheme(s).

~~46.48.~~ A device according to any of Claims 1-~~40~~42, having dual- frequency driving scheme(s).

~~47.49.~~ A device according to any of Claims 1-~~40~~42, having cumulative driving scheme(s).

~~48.50.~~ A device according to Claim ~~47~~49, having cumulative two phase driving scheme(s).

~~49.51.~~ A device according to any of Claims 1-~~40~~42, having unipolar driving scheme(s).

~~50.52.~~ A device according to any of Claims 1-~~40~~42, having multiple selection driving scheme(s).

~~51.53.~~ A device according to any of the preceding claims, in which lower threshold voltage can be achieved by using a longer pitch chiral nematic material or smaller cell gap

~~52.54.~~ A full spectrum black-and-white reflective chiral nematic display, substantially as hereinbefore described with reference to the accompanying drawings.

~~53.55.~~ A full spectrum black-and-white reflective chiral nematic display, substantially as described in the or (??) each Example.

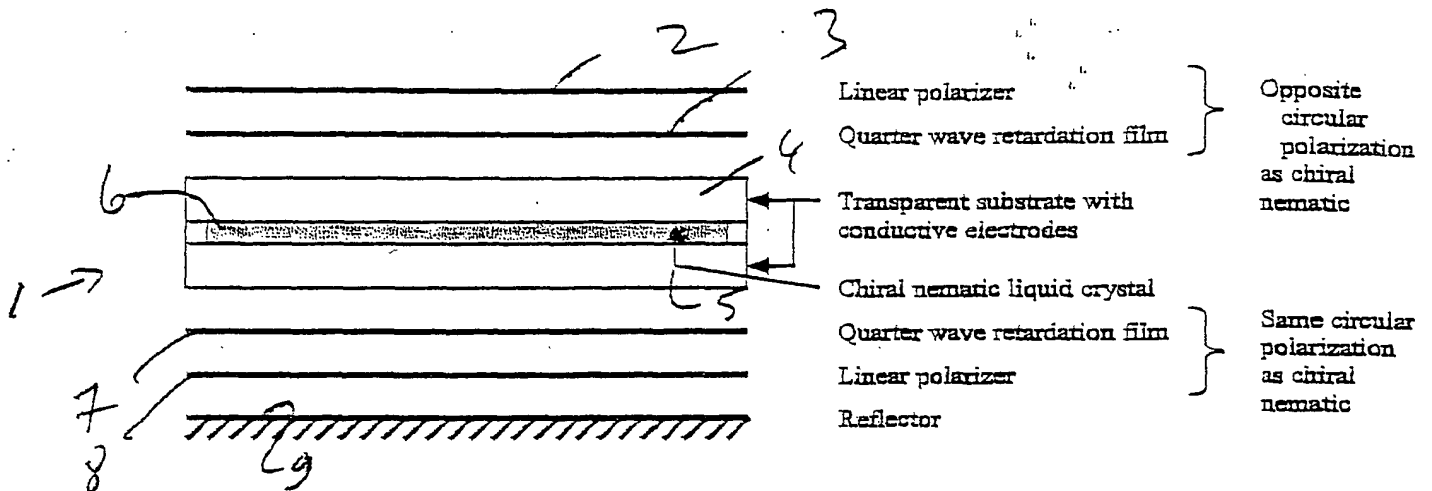


Figure 1. First optical configuration of black-and-white chiral nematic display.

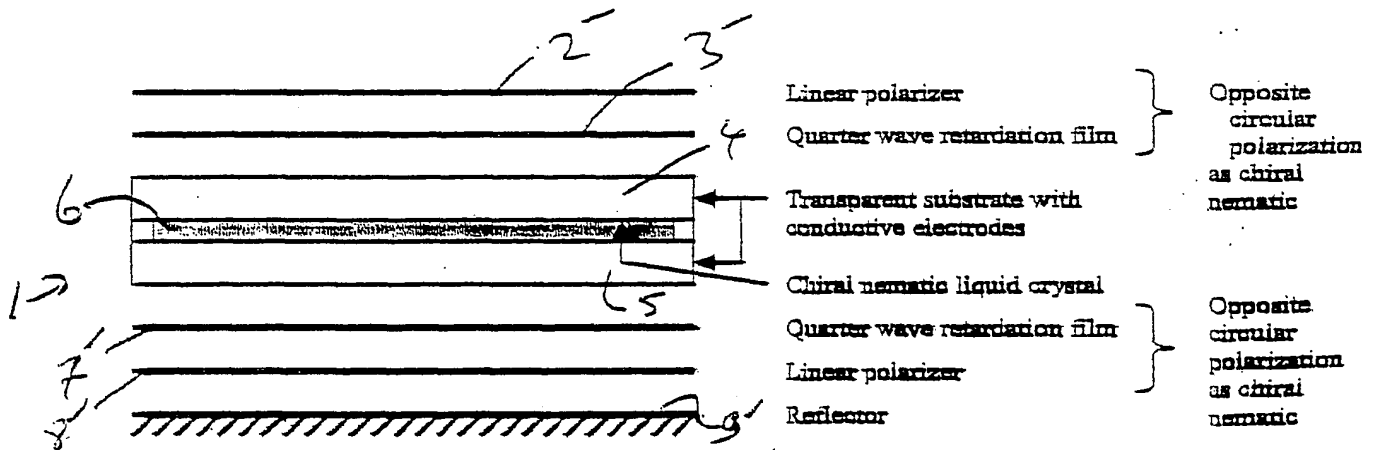


Figure 2. Second optical configuration of black-and-white chiral nematic display.

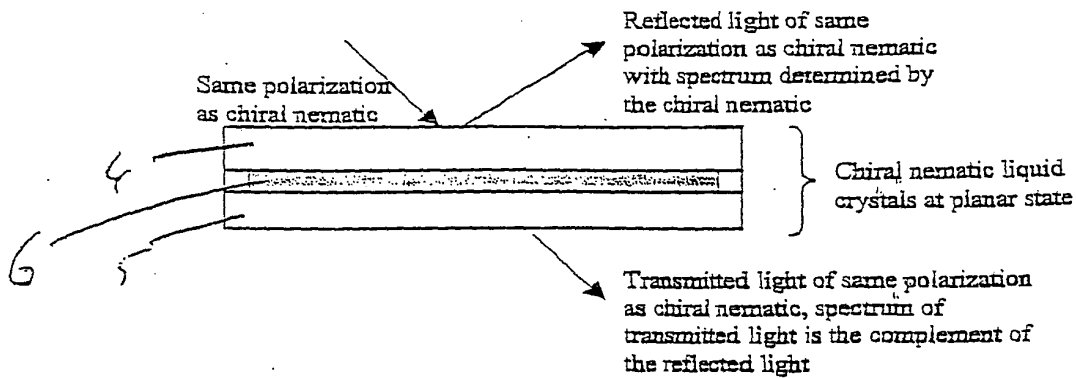


Figure 3. Reflection and transmission properties of same polarization incoming light through a planar state chiral nematic display.

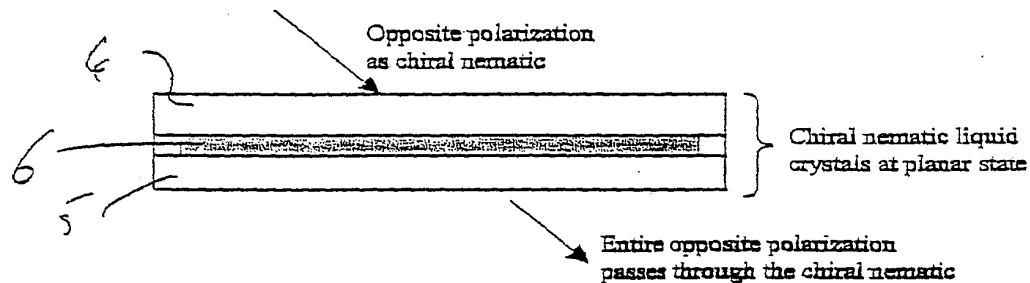


Figure 4. Reflection and transmission property of opposite polarization incoming light through a planar state chiral nematic display.

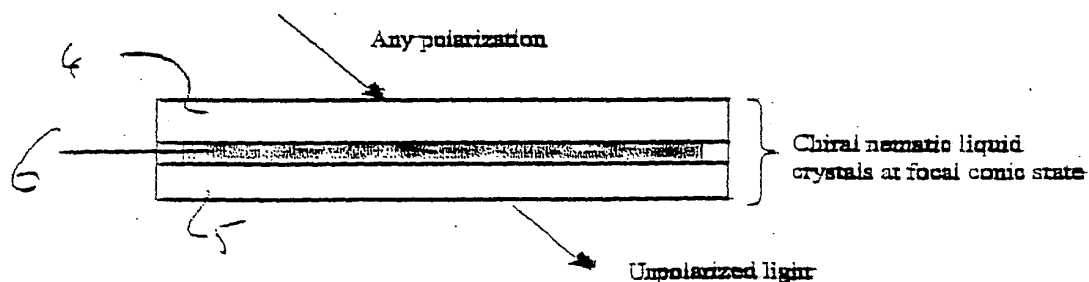


Figure 5. Reflection and transmission property through a focal conic state chiral nematic display.

